




- Head Office-Dongguan
- Production Base-Dongguan, Wuxi
- Regional Service Centre-India, Turkey, USA
- ★ Sales & Service Office
- R&D Centre -Dongguan

Rubber Track

Automatic Production Solution

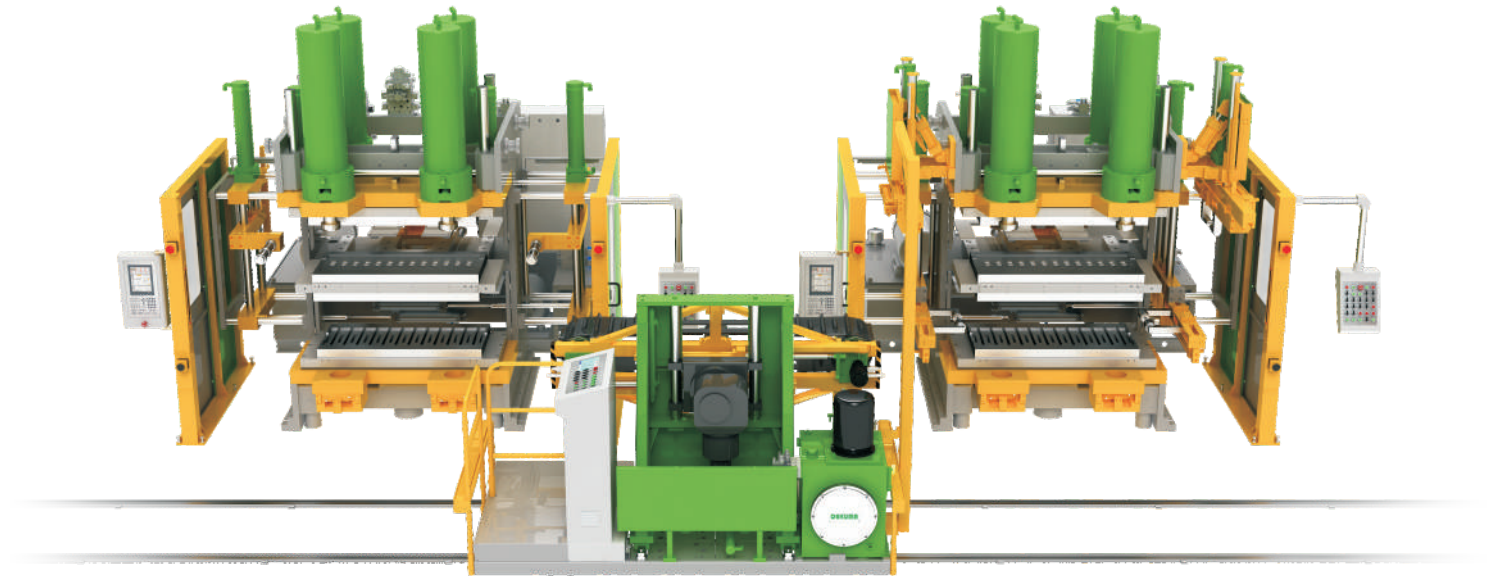

Make it in an easy way!



DEKUMA RUBBER AND PLASTIC TECHNOLOGY(DONGGUAN)LTD.
(Member of Cosmos Machinery Ltd.)

Yinzhu Rd,Zhouwu Industrial Park,Dongcheng District,
Dongguan,Guangdong,China
Tel: +86-769-22667200 Fax: +86-769-22667227
E-mail: info@dekuma.com



An ISO 9001 certified company



Rubber Track Production Line



Characteristics

- **High automation:** Automatic rubber material transferring, automatic steel cord tensioning, semi-automatic taking out product.
- **Energy-saving:** Hydraulic pump adjusts the energy consumption during curing to avoiding the energy lost. Clamping force keeps stable during production.
- **Hydraulic precise control multiple actions:** the flow of the pumps can be precisely adjusted from 0-100% during the multiple actions.
- **Longer product life:** Perfect performance between clamping unit and tension device improves the product life 50% longer.
- **Smart control product quality:** Smart control and inspect the performance, data-adjust, data-saving of the machine.

Applications

Suitable for the production of rubber tracks for agriculture, engineering, military, snowmobiles, etc.



Machine Specifications

ITEM		DKM-RC280	DKM-RC480	DKM-RC650
Clamping Force	Ton	280	480	650
Heating Plate Dimension	mm	1550 x 640	1960 x 750	1850 x 1050
Mould Opening Stroke	mm	400	400	720
Distance Between Heating Plates	mm	550	550	900
Min.Mould Thickness	mm	150	150	180
Max.Width of Track	mm	450	550	800
Range of Track	mm	3780-4860	4800-6400	6400-9000
System Pressure	bar	210	210	210

We reserve the right to change any design and specification without notice.